



Commercial status

End of Commercialisation : JAN 23, 2021

 End of Commercialisation

Main

Range of product	Modicon Premium Automation platform
Product or component type	Unity processor
Software designation	Unity Pro

Complementary

Concept	Transparent Ready
Number of racks	16 4/6/8 slots 8 12 slots
Number of slots	128 96 64
Discrete I/O processor capacity	1024 I/O
Analogue I/O processor capacity	80 I/O
Number of application specific channel	24
Number of process control channel	10 up to 30 simple loops
Integrated connection type	Non isolated serial link 2 female mini DIN connector (RS485) (19.2 kbit/s) Ethernet TCP/IP RJ45 connector
Port Ethernet	10BASE-T/100BASE-TX
Communication module processor capacity	4 1
Memory description	Internal RAM (with PCMCIA card) 160 kB data Internal RAM (with PCMCIA card) 768 kB program Internal RAM (without PCMCIA card) 160 kB program and data PCMCIA card 16384 kB additional data storage
Maximum size of object areas	64 %KWi constant words located internal data 64 %MWi internal words located internal data 64 kB (DFB and EFB function blocks) unlocated internal data 64 kB (elementary and derived data) unlocated internal data 8132 %Mi located internal bits
Application structure	64 event tasks 1 master task 1 fast task
Execution time per instruction	0.19 µs Boolean without PCMCIA card 0.25 µs word or fixed-point arithmetic without PCMCIA card 1.75...2.6 µs floating points with PCMCIA card 1.75...2.6 µs floating points without PCMCIA card 0.21 µs Boolean with PCMCIA card 0.42 µs word or fixed-point arithmetic with PCMCIA card
Number of instructions per ms	2.53 Kinst/ms 65 % Boolean + 35 % fixed arithmetic with PCMCIA card 3.7 Kinst/ms 100 % Boolean with PCMCIA card 3.71 Kinst/ms 65 % Boolean + 35 % fixed arithmetic without PCMCIA card 4.76 Kinst/ms 100 % Boolean without PCMCIA card

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

System overhead	0.3 Ms for fast task 1 Ms for master task
Marking	CE
Local signalling	1 LED (green) for Ethernet TCP/IP port ready (RUN) 1 LED (green) for processor running (RUN) 1 LED (red) for collision detection (COL) 1 LED (red) for Ethernet TCP/IP port fault (ERR) 1 LED (red) for I/O module or configuration fault (I/O) 1 LED (red) for processor or system fault (ERR) 1 LED (yellow) for activity on TER or AUX terminal port (TER) 1 LED (yellow) for Ethernet link diagnostics (STS) 1 LED (yellow) for reception activity (RX) 1 LED (yellow) for transmission activity (TX)
Current consumption	1650 mA at 5 V DC
Module format	Double
Net weight	0.042 Kg

Environment

Standards	CSA C22.2 No 213 Class I Division 2 Group B IEC 61131-2 93/68/EEC 89/336/EEC UL 508 92/31/EEC CSA C22.2 No 213 Class I Division 2 Group A CSA C22.2 No 142 CSA C22.2 No 213 Class I Division 2 Group D CSA C22.2 No 213 Class I Division 2 Group C 73/23/EEC
Product certifications	LR BV RMRS GL RINA DNV ABS
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-25...70 °C
Relative humidity	10...95 % without condensation for operation 5...95 % without condensation for storage
Operating altitude	0...2000 m
Protective treatment	TC
IP degree of protection	IP20
Pollution degree	2

Packing Units


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	734 G
Package 1 Height	9.5 Cm
Package 1 width	18 Cm
Package 1 Length	26 Cm
Unit Type of Package 2	S04
Number of Units in Package 2	6
Package 2 Weight	5.351 Kg
Package 2 Height	30 Cm
Package 2 width	40 Cm
Package 2 Length	60 Cm

Contractual warranty

Warranty	18 months
----------	-----------

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks

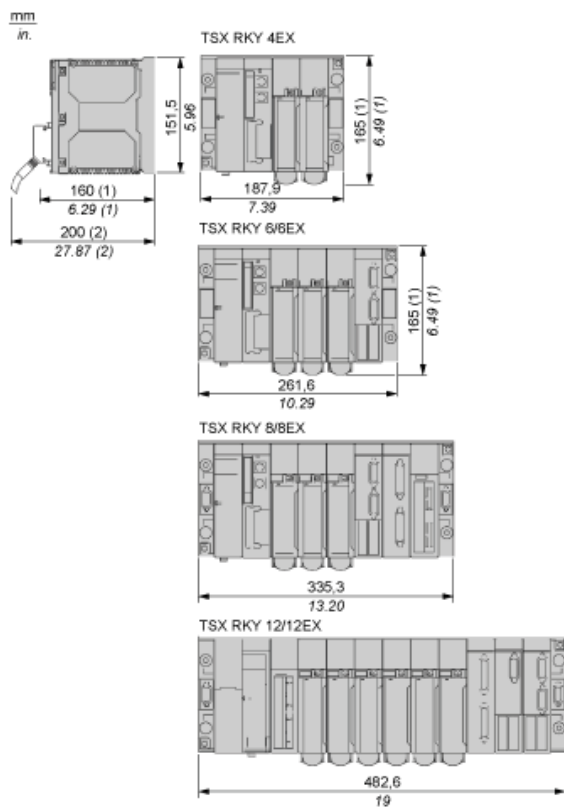

- (1) With screw terminal block modules.
- (2) Maximum depth for all types of modules and their associated connectors.

Product Life Status : **Post commercialisation**