

Product data sheet

Specifications



discrete output module, Modicon X80, 8 NO relay outputs, 24 to 240V AC, 24 to 125V DC

BMXDRA0815

Main

Range of product	Modicon X80
Product or component type	Relay discrete output module
Discrete output logic	Positive

Complementary

Minimum switching current	1 mA 5 V DC
Response time on output	<= 10 ms activation <= 13 ms deactivation
Insulation resistance	> 10 MOhm 500 V DC
MTBF reliability	3200000 H
Protection type	External short-circuit protection External overload protection External overvoltage protection, inductive AC network External overvoltage protection, inductive DC network
Product weight	0.169 kg

Environment

IP degree of protection	IP20
Protective treatment	Standard version
Dielectric strength	1780 V AC at 50/60 Hz 1 min
Relative humidity	5...95 % at 60 °C without condensation

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.700 cm
Package 1 Width	11.700 cm
Package 1 Length	11.700 cm
Package 1 Weight	200.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	15
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm

Package 2 Weight 3.319 kg

Contractual warranty

Warranty (in months) 18



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	157 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	26 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0.1 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	131 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.4 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again



Repack and remanufacture

Recyclability potential, in %	3
End of life manual availability	End of Life Information
Take-back	No

Dimensions Drawings

Modules Mounted on Racks

Dimensions



(1) With removable terminal block (cage, screw or spring).

(2) With FCN connector.


(3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81

Connections and Schema


Connecting the Module

Output Circuit Diagram

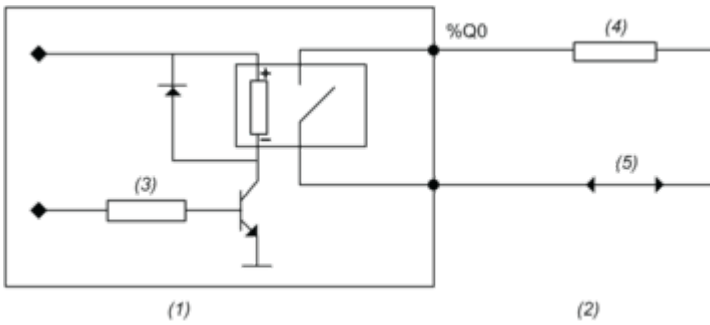

- (1) Module
- (2) Output
- (3) Command
- (4) Pre-actuator
- (5) Power supply

Module Connection

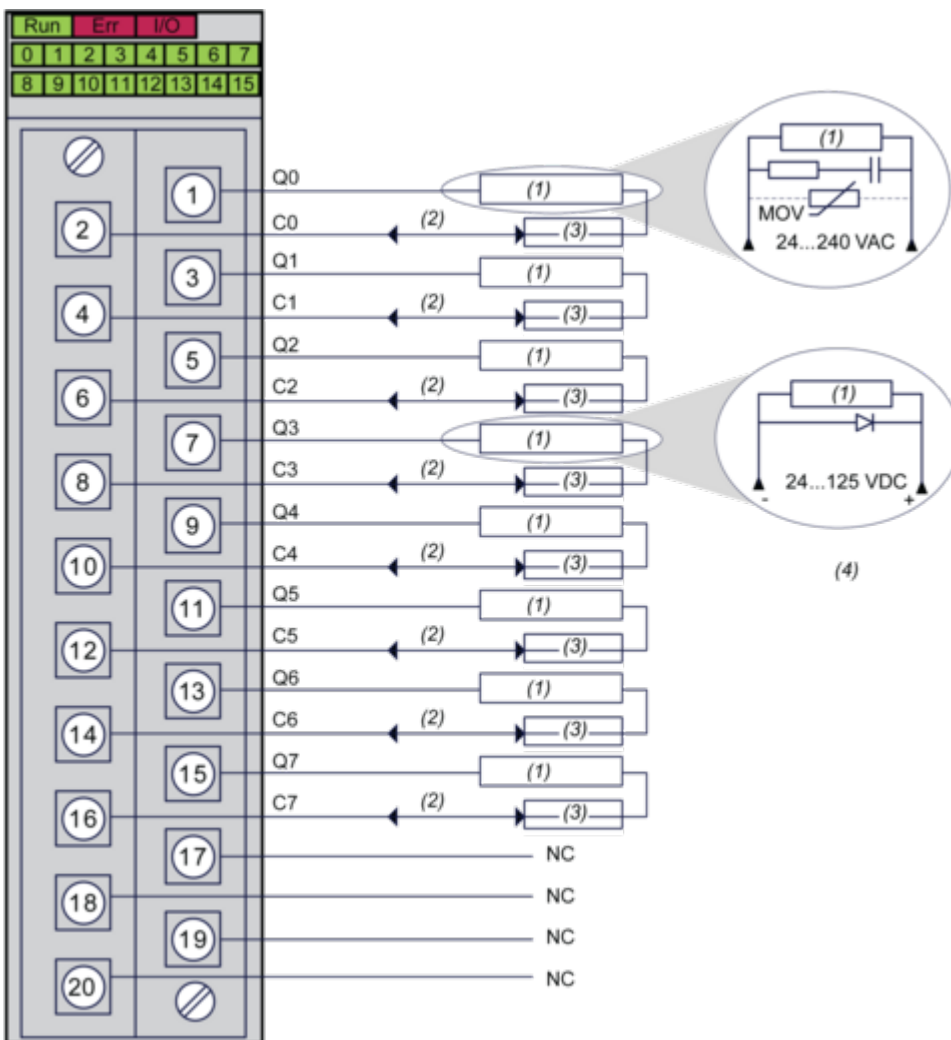

- (1) Pre-actuator
- (2) Power supply : 24...125 Vdc or 24...240 Vac

(3) Fuse : Use appropriate fast-blow fuse for each relay

(4) We recommend installing this type of protection on the terminals of each pre-actuator

N/C : Not connected

Image of product / Alternate images

Alternative



